

## FIRE EMERGENCY LIGHT SERIES



### Project 680C

Product number: ZFZD-E3W-680C

Main power consumption: 2x3W (LED)

Protection level: IP30

Operating Voltage: AC 220V 50Hz

Rechargeable battery backup: Ni-Cd 1.2V 800mAh


Emergency time: 120 Minutes

Charging time: 48 Hours

Product size: 258x250x50 mm

Hanging hole spacing: 210 mm

Execution standard: TCVN 3890:2009

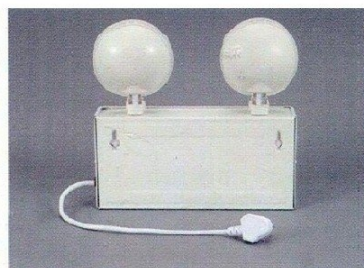

### Project 680F

Product number: AB-LED-E3W-680F

Main power consumption: 2x3W (LED)

Protection level: IP30

Operating Voltage: AC 220V 50Hz

Rechargeable battery backup: Ni-Cd 1.2V 800mAh

Emergency time: 120 Minutes

Charging time: 48 Hours

Product size: 258x250x50 mm

Hanging hole spacing: 210 mm

Execution standard: TCVN 3890:2009



## FIRE EXIT LIGHT SERIES



### Project 830

Product number: **AE-BLZD-LROEI3W-830**

Main power consumption: **3W**

Protection level: **IP30**

Operating Voltage: **AC 220V 50Hz**

Rechargeable battery backup: **Ni-Cd 1.2V 800mAh**

Emergency time: **120 Minutes**

Charging time: **48 Hours**

Product size: **320x136x20 mm**

Hanging hole spacing: **295 mm**

Execution standard: **TCVN 3890:2009**



### Project 830

Product number: **AE-BLZD-LROEI3W-830**

Main power consumption: **3W**

Protection level: **IP30**

Operating Voltage: **AC 220V 50Hz**

Rechargeable battery backup: **Ni-Cd 1.2V 800mAh**

Emergency time: **120 Minutes**

Charging time: **48 Hours**

Product size: **320x136x20 mm**

Hanging hole spacing: **295 mm**

Execution standard: **TCVN 3890:2009**

**FIRE EXIT LIGHT SERIES**



**Project 1890A**

Product number: **AB-BLZD-LROEI3W-1890A**

Main power consumption: **3W**

Protection level: **IP30**

Operating Voltage: **AC 220V 50Hz**

Rechargeable battery backup: **Ni-Cd 1.2V 800mAh**

Emergency time: **120 Minutes**

Charging time: **48 Hours**

Product size: **340x140x20 mm**

Hanging hole spacing: **315 mm**

Execution standard: **TCVN 3890:2009**



**Project 1890A**

Product number: **AB-BLZD-LROEI3W-1890A**

Main power consumption: **3W**

Protection level: **IP30**

Operating Voltage: **AC 220V 50Hz**

Rechargeable battery backup: **Ni-Cd 1.2V 800mAh**

Emergency time: **120 Minutes**

Charging time: **48 Hours**

Product size: **340x140x20 mm**

Hanging hole spacing: **315 mm**

Execution standard: **TCVN 3890:2009**



## FIRE EXIT LIGHT SERIES



### Project 1890A

Product number: **AB-BLZD-LROEI3W-1890A**

Main power consumption: **3W**

Protection level: **IP30**

Operating Voltage: **AC 220V 50Hz**

Rechargeable battery backup: **Ni-Cd 1.2V 800mAh**

Emergency time: **120 Minutes**

Charging time: **48 Hours**

Product size: **340x140x20 mm**

Hanging hole spacing: **315 mm**

Execution standard: **TCVN 3890:2009**



### Project 1890A

Product number: **AB-BLZD-LROEI3W-1890A**

Main power consumption: **3W**

Protection level: **IP30**

Operating Voltage: **AC 220V 50Hz**

Rechargeable battery backup: **Ni-Cd 1.2V 800mAh**

Emergency time: **120 Minutes**

Charging time: **48 Hours**

Product size: **340x140x20 mm**

Hanging hole spacing: **315 mm**

Execution standard: **TCVN 3890:2009**